


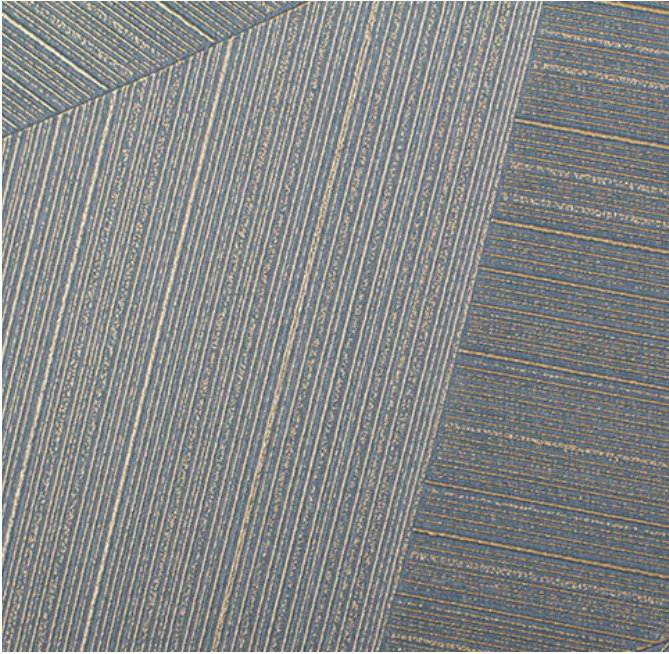

Physical Properties

Content: 100% Type II Vinyl
Backing: Osnaburg/Polyester
Width: 52/54" 132/137cm
Weight: 20 oz./LY - 618 G/LIN M
Horizontal repeat: 54"/137 cm
Install Information: 18: Straight match

Performance

Fire Rating: Class A ASTM E84
Flame Spread: 15
Smoke Developed: 40
Meets Federal Specifications CCC - 408 - A,B,C,D
Tensile: 50 x 55
Tear: 25 x 25
Color Fastness to light 200 hrs.: Good
BS2782 - Pass (UK Test)
5 Yr. warranty against manufacturer defect Clean:
Use a soft rag and water-based, mild detergent;
avoid solvents and scrubbing

Sustainability

Low emitting - passes Cal 01350 Standard (LEED EQ 4.2)
Product contains up to 40% recycled content
Free of conflict minerals, heavy metals, solvents, phthalates (BBP, DBP, DEHP, DIDP, DnHP, DnOP), PFC/PFOA
Printed with Solvent-Free Inks
This product has a CE Declaration of Conformity.

Manufactured in the USA



luxesurfaces

© 2020 Luxe Surfaces
All Rights Reserved