



Physical Properties

Content: 100% Type II Vinyl

Backing: Polycotton

Width: 52/54"

Weight: 20 oz./LY - LY 620 G/LM

13.3 oz./SQY - 451 G/SM

Install Information: Reversible - random match

Performance

Fire Rating: Class A ASTM E84

Flame Spread: 20

Smoke Developed: 40

Meets Federal Specifications CCC - 408 A/D

CAL 01350 - meets emission requirements for schools and offices

The City of New York Department of Building

MEA-205-90M has accepted this product for use

Contains bactericides & mildew inhibitors to protect products from microbiological and mildew growth

5 YR. warranty against manufacturer defects

Clean: Use a soft rag and water-based, mild detergent; avoid solvents and scrubbing

Sustainability

Low VOC


Non-phthalate (DOTP replaced DINP)

Antimony free

Formaldehyde free

Free of conflict minerals

Printed with Solvent-Free water based inks

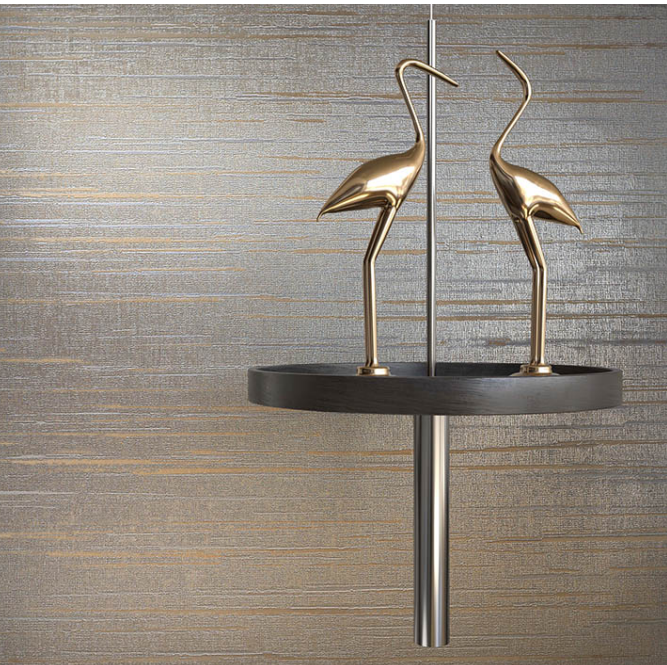

Manufactured in the USA

luxesurfaces

© 2020 Luxe Surfaces
All Rights Reserved